


## Espuma de PVC 130

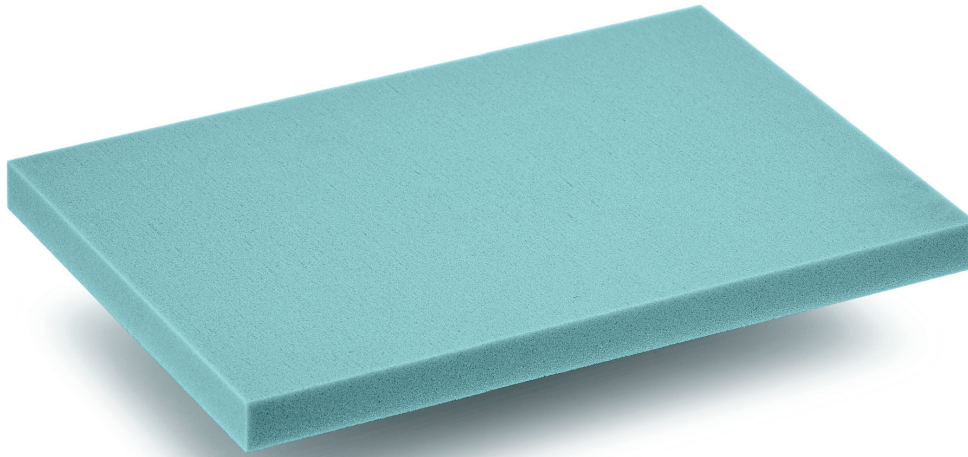

Densidad kg/m <sup>3</sup>	ASTM D1622	kg/m <sup>3</sup>	nominal	130
Resistencia a la compresión	ASTM D1621-10	MPa	average min-ave min-min	2,73 2,52 2,25
Modulo de compresión	ASTM D1621-10	MPa	average min-ave min-min	125 111 99
Resistencia a la rotura	ASTM D1623	MPa	average min-ave min-min	3,81 3,04 2,79
Modulo de rotura	ASTM D1623	MPa	average min-ave min-min	216 185 170
Resistencia al corte	ASTM C273	MPa	average min-ave min-min	2,03 1,97 1,79
Modulo de corte	ASTM C273	MPa	average min-ave min-min	49 45 41
Alargamiento de corte a la rotura	ASTM C273	%	average	32
Medidas estandar		mm		850 1900 58